



STOCKING DISTRIBUTOR AND SERVICE CENTER FOR STRAIGHT AND COIL TUBING



AN ISO 9001:2015 CERTIFIED COMPANY

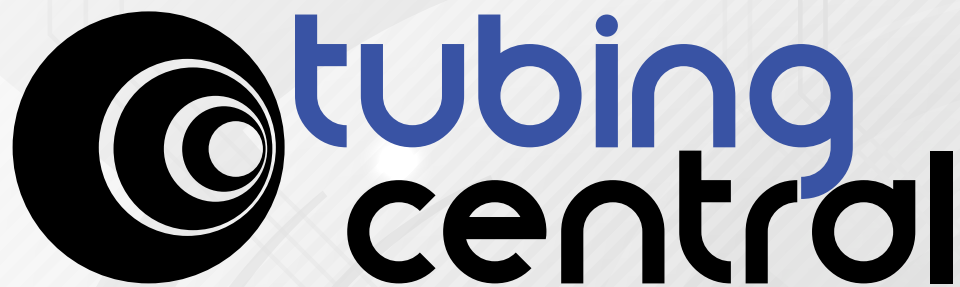

7865 WILL ROGERS BLVD., FORT WORTH, TEXAS 76140. USA

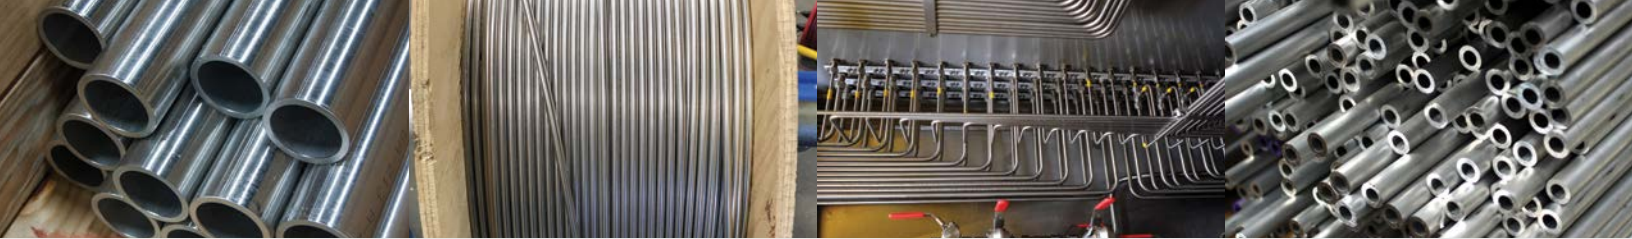

ALLOYS

USA, CANADA & WESTERN EUROPE BRANDS

| ALLOYS | FORM | | TYPE | | SIZES (OD) | STANDARDS |
|---------------------|-------|------|------|-----|---------------|---------------------------------|
| | STICK | COIL | SMLS | WLD | | |
| 304/304L | • | • | • | • | 1/8"-4" | ASTM A269/A213(SMLS)/A249(WLD) |
| 304/304L Mechanical | • | | • | | 1/2"-8" | ASTM A511 |
| 310S/310H | • | | • | | 1/4"-1" | ASTM A269/A213 |
| 316/316H | • | | • | | 1/4"-1/2" | ASTM A213 |
| 316/316L | • | • | • | • | 1/16"-4" | ASTM A269/A213(SMLS)/A249(WLD) |
| 316/316L | • | | • | | 3mm-25mm | ASTM A269/A213 |
| 316/316L 1/8-Hard | • | | • | | 1/4"-1" | ASTM A269/A213 |
| 316/316L Mechanical | • | | • | | 1/2"-8" | ASTM A511 |
| 317/317L | • | | • | | 1/8"-1" | ASTM A269/A213 |
| 904L | • | | • | | 1/8"-1" | ASTM A269 |
| 6MO/ Alloy 254 | • | | • | | 1/4"-1" | ASTM A269/A213 |
| 2205 Duplex | • | | • | | 1/4"-1" | ASTM A789 |
| 2507 Super Duplex | • | | • | | 1/8"-1" | ASTM A789 |
| Tungum® | • | | • | | 1/4"-1" | ASTM B706 |
| Alloy 20 | • | | • | | 1/4"-1/2" | ASTM B729 |
| Alloy 400 | • | • | • | | 1/8"-1" | ASTM B163/B165 |
| Alloy 600 | • | | • | | 1/8"-1" | ASTM B163/B167 |
| Alloy 625 | • | | • | | 1/8"-3/4" | ASTM B444 |
| Alloy 825 | • | • | • | | 1/8"-1" | ASTM B163/B429 |
| Alloy C276 | • | • | • | | 1/8"-1" | ASTM B622 |
| Titanium Gr. 2 | • | | • | | 1/8"-1/2" | ASTM B338 |
| C12200 Copper | • | • | • | | 1/8"-3/4" | ASTM B68/B75 |
| 6061-T6 Aluminum | • | | • | | 1/4"-1" | ASTM B210, AMS 4038 & WWT-700/6 |
| Carbon Steel | • | | • | | 1/4"-2" | SAE J524, AMS 5050, ASTM A179 |

CHINA & INDIA BRANDS


| | | | | | | |
|---------------------|---|--|---|--|----------|----------------|
| 304/304L | • | | • | | 1/8"-2" | ASTM A269/A213 |
| 304/304L Mechanical | • | | • | | 1/2"-16" | ASTM A511 |
| 316/316L | • | | • | | 1/8"-2" | ASTM A269/A213 |
| 316/316L | • | | • | | 6mm-25mm | ASTM A269/A213 |
| 316/316L Mechanical | • | | • | | 1/2"-16" | ASTM A511 |

+1-817-986-0940



SERVICES

| SERVICE | DESCRIPTION |
|----------------------|---|
| Coiling | De-coil, cut, and re-coil to provide exact length coil tubing to your specifications. Coils can be as short as 50 feet and as long as several thousand feet. |
| Jacketing/Insulating | Tubing is encapsulated with jackets, such as PVC, PP, and others, and/or with thermal insulation for applications requiring UV resistance, added corrosion resistance, and temperature control. |
| Orbital Welding | Orbital welding is performed on both straight and coil tubing. Coils are welded together to provide many thousands of feet in one length. Straight tubing is welded together to provide a shorter custom length out of harder to find materials. |
| Cutting | Small quantity cutting or large production cutting operations with thousands of cuts are handled in house. All cuts are held to tight tolerances and can be deburred and cleaned based on customer requirements. |
| Bending | Custom tube bends allow for the installation of complex geometries and/or provide a special flow path. Bending methods include induction bending and cold bending. |
| Mechanical Polishing | Mechanical polishing is performed on the inside and/or the outside of tubing. This can be used simply for ornamental reasons, or to prepare the tubing for sanitary and high purity applications. |
| Electropolishing | Electropolishing is used on tubing for applications where cleanliness is of the utmost importance. Tubing is provided with interior surface finishes of 20 μ -in Ra, 15 μ -in Ra, and 10 μ -in Ra. Tubing is then cleaned with deionized water, dried, capped, and bagged to maintain cleanliness until installation. |
| Oxygen Cleaning | Tubing is oxygen cleaned to be used in oxygen rich and other laboratory environments where contaminants cause risk of combustion. Tubing is cleaned to ASTM G93, CGA G4.1, and customer specifications, then capped and bagged to maintain cleanliness. |
| Passivating | Tubing is passivated to improve the natural passive layer of stainless and alloy steels. Passivation can also be used as part of the cleaning process for Oxygen Cleaned and Electropolished tubing. |
| SilcoNert® Coating | SilcoNert® coated tubing provides an inert flow path for better analytical results. This coating is applied to straight and coil tubing for a variety of applications, including extraction of process fluids for analysis, emission measurements from flares and stacks, downhole sampling, and laboratory equipment. |
| Special Testing | Special testing is performed to meet non-standard customer requirements. Special testing includes Pressure Testing, Ultrasonic Testing, Corrosion Testing, Chemical Analysis, and Mechanical Testing. |
| Custom Tubing | If it isn't in stock, there are a variety of solutions to deliver any custom tubing requirement. Methods include redrawing stock tubing and drilling out solid bar. |

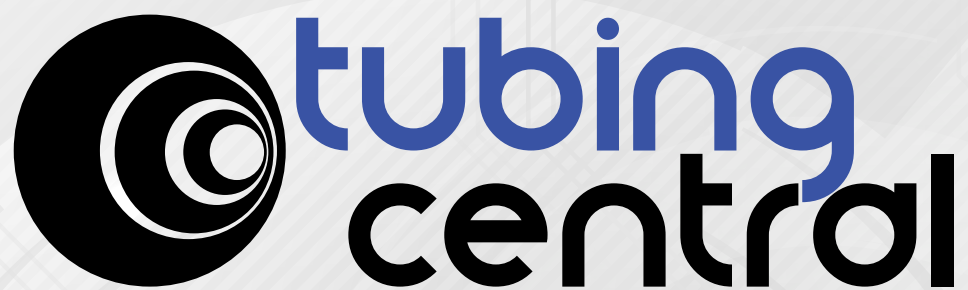

AN ISO 9001:2015 CERTIFIED COMPANY

7865 WILL ROGERS BLVD.
FORT WORTH, TEXAS 76140. USA

+1-817-986-0940

info@tubingcentral.com

tubingcentral.com

